




P.O. Box 519	1351 W. Second Street	379 Davis Road, Unit #3
Corona, California 92878-0519	Oconomowoc, Wisconsin 53066	Oakville, Ontario, Canada L6J 2X2
Phone: 909-735-8220; 800-543-3885; 800-735-1922	Phone: 262-567-2288	Phone: 905-844-1791; 800-361-9473
Fax: 909-735-2372; 800-752-6001; 800-735-0857	Fax: 262-567-0857	Fax: 905-844-2533; 800-663-0933

INSTALLATION INSTRUCTIONS • DUCT-O-BAR FIGURE 8 SYSTEMS

SUPPLEMENTARY INSTALLATION INSTRUCTIONS

FE-1DC JOINT KEEPER CLIP

1. After conductor bar sections have been pulled together, install the joint keeper clip by inserting the small end (A) into a connector tool hole from the seam side of the bar.
2. To snap the other end of the joint keeper (B) into the other connector tool hole, line up the clip near the hole, then apply pressure to the clip in the area shown by the arrow. Use a pliers, if necessary, to help force the clip into the hole.
3. Install the splice cover over the exposed sections of the conductor bar in the normal manner.

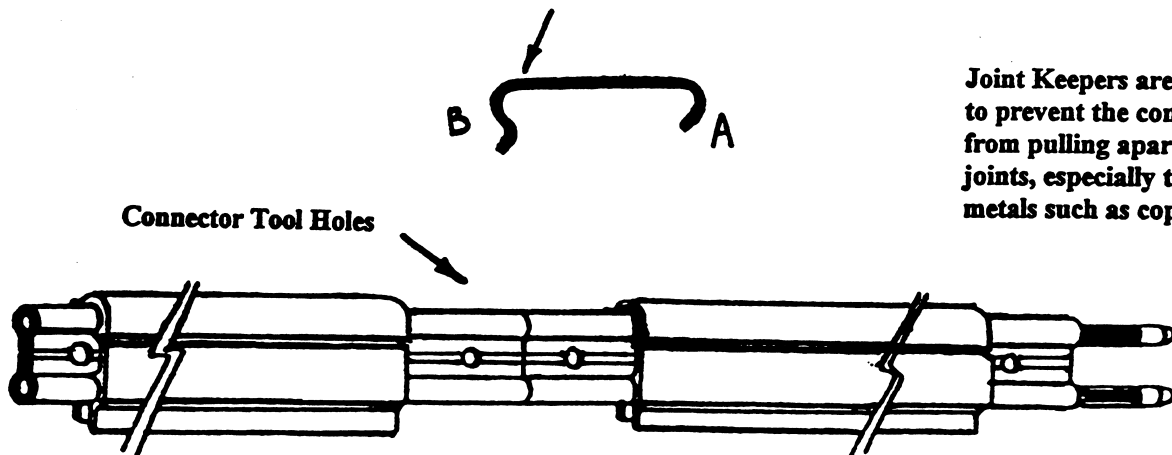

Joint Keepers are designed to prevent the conductors from pulling apart at the joints, especially the softer metals such as copper.

CAUTION

MAKE CERTAIN POWER SUPPLY IS DISCONNECTED BEFORE INSTALLING, REPAIRING, OR WORKING IN THE PROXIMITY OF ANY ELECTRICAL SYSTEM. ONLY QUALIFIED ELECTRICAL PERSONNEL SHOULD INSTALL OR REPAIR THESE PRODUCTS.